


The Hadron Carrier Board for Orin™ NX is an ultra small, rugged and feature rich carrier for AI Computing at the Edge.



Just slightly larger than the Jetson™ SODIMM module, Hadron is ideal for vision applications, inference, and unmanned payloads.

Since the Hadron carrier board is compatible with the Jetson Orin™ NX, Orin™ Nano, Xavier™ NX, and TX2™ NX modules, users can transition between modules depending on their AI processing requirements.

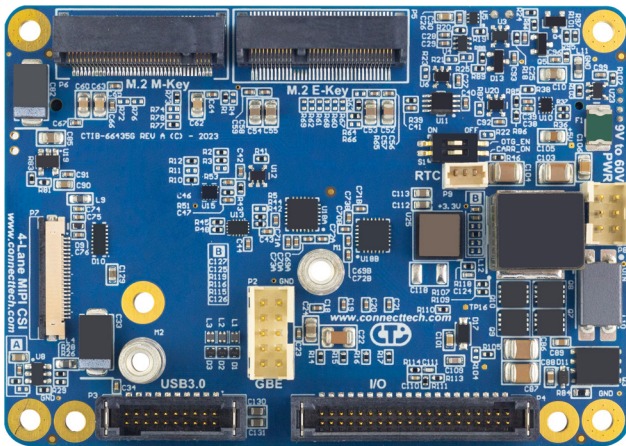

Hadron's design includes a wide input voltage, rich I/O set as well as locking IO connectors optimized for rugged environments.

## FEATURES

- ✓ Rugged latching connectors
- ✓ GPIO, PWM, I2C, RS-232, 3.3V UART, SPI
- ✓ 2x USB3.1, 1x GbE, 1x 4-Lane, mipi CSI2, 1x 2242/2230 NVMe, 1x M.2 E-Key (WiFi/BT)
- ✓ Wide Input Range: +9V to +60V

## SPECIFICATIONS

|                              |  |   |   |
|------------------------------|--|---|---|
| <b>Ethernet</b>              | 1x 1000BASE-T Ports<br>(Connector: Positive Locking Pin Headers) | <b>USB</b>  | 2 x USB 3.1 (Gen 2)<br>1x USB 2.0 Programming Port<br><br>(HD pin headers)  |
| <b>Dimensions</b>            | 82.6mm x 58.8mm (3.25" x 2.31")                                  | <b>Storage</b>  | 1x 2242/2230 NVMe (M-Key)   |
| <b>MIPI Cameras</b>          | 1x 4-lane MIPI CSI-2<br>- 22-pin FPC Connector                   | <b>Misc Interfaces</b>  | 1x 3.3V TTL UART (CONSOLE)<br>2x RS-232 Serial Ports<br>4x PWM capable GPIO<br>1x 3.3V I2C<br>1x 3.3V SPI<br>External +5V |
| <b>Operating Temperature</b> | -25°C to +85°C (-13°F x 185°F)                                   | <b>Expansion</b>  | 1x M.2 E-Key for WiFi/BT  |
| <b>FAN</b>                   | 1x 4-pin Fan Connector (5V 1x4 Picoblade)                        | <b>Power Input</b>  | Wide Power Input:<br>+9V to +60V DC (+12V to +48V DC Nom.)  |
| <b>Power - RTC Battery</b>   | 3-Pin RTC Battery Connector                                      | <b>Weight</b>   | 49g   |
| <b>Warranty and Support</b>  | 1 Year Warranty and Free Support                                 | <b>Specification changes when used with Xavier NX, TX2-NX</b> | 1x USB3.1<br>1x USB2.0  |