



OmniWise Sirius AI Box ONX 8GB

Overview

Efficient AI Processing for Edge Applications

Sirius AI Box NX 8GB is designed for projects requiring advanced AI and machine learning capabilities with a focus on power efficiency. Perfect for compact and portable devices, this module excels in applications such as intelligent video analytics, autonomous robots, and smart sensors, where maintaining low power consumption is critical. Its balanced processing power and energy efficiency make it an ideal choice for edge AI solutions that need to operate seamlessly in constrained environments without sacrificing performance.


- 2x USB 3.0 Ports (Type-A)
- 1x USB OTG (Micro)
- 1x 10/100/1000 Base-T RJ45
- 1x HDMI 2.0
- 1x 3.3V UART, 1x I2C bus, 2x SPI bus, 4x GPIO
- Wide input voltage range from 9V to 36V DC
- Operating Temperature -25°C ~ +85°C
- Fanless Design



SPECIFICATIONS

Jetson Module	Jetson Orin NX 8GB	AI Performance	70 TOPS (INT8)
GPU	1024-core NVIDIA Ampere architecture GPU with 32 tensor cores	CPU	6-core Arm® Cortex®-A78AE v8.2 64-bit CPU
Memory	8GB 128-bit LPDDR5	Dimensions	124mm(L) x 86mm(W) x 74mm(H)
MISC / IO Connector	1x 3.3V UART, 1x I2C bus 2x SPI bus, 4x GPIO	USB	2x USB 3.0 Ports (Type-A) 1x USB OTG (Micro)
DL Accelerator	1x NVDLA v2.0	Power Configuration	10W - 20W
Display Output	1x HDMI 2.0	Camera Inputs	2x MIPI CSI-2 15 Pin
Networking	1x 10/100/1000 Base-T RJ45	Wireless	1x M.2 E-Key - 2230
Storage	1x NVME M.2 M-Key SSD - 2280	Input Power	9V-36V DC Input
Operating Temperature	-25°C to +85°C	Weight	909g (Including Antenna)
Video Encode	1x 4K60 3x 4K30 6x 1080p60 12x 1080p30 (H.265) H.264, AV1	Video Decode	1x 8K30 2x 4K60 4x 4K30 9x 1080p60 18x 1080p30 (H.265) H.264, VP9, AV1

OmniWise Sirius AI Box ONX 8GB

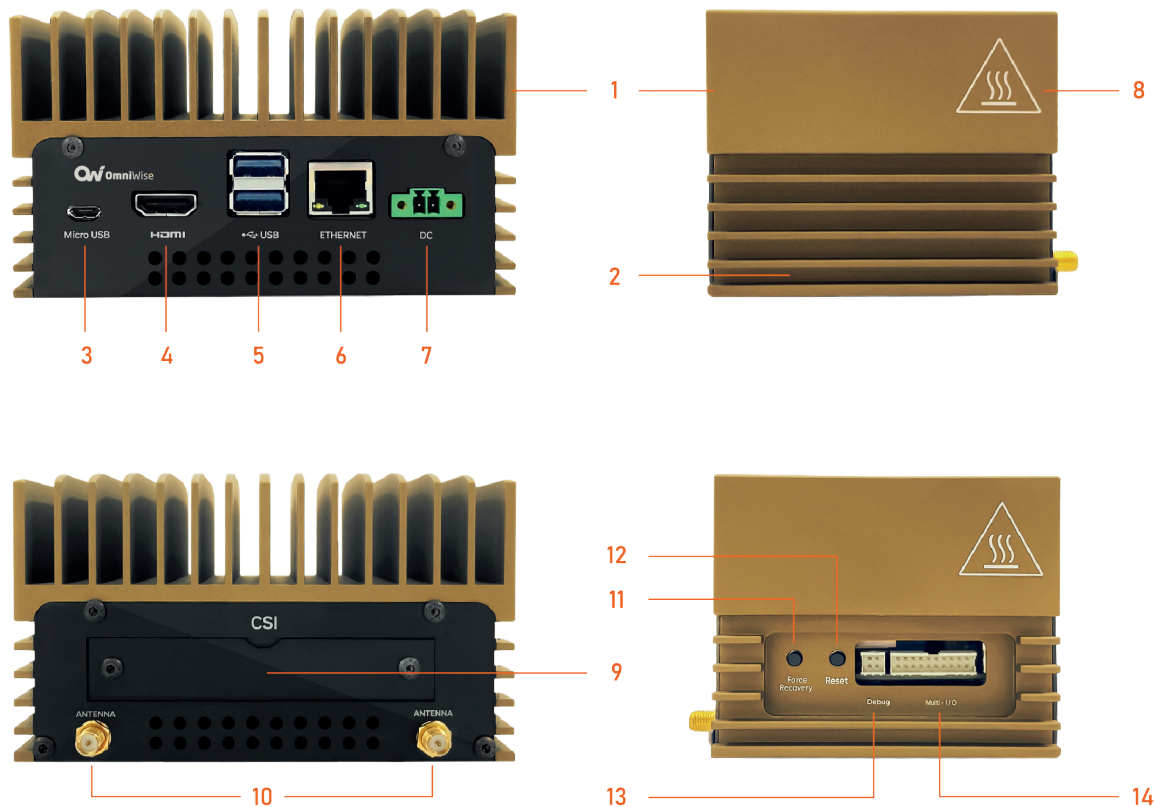

Number	Name	Description
1	Heatsink	Passive Heatsink
2	Case	124mm(L) x 86mm(W) x 74mm(H) - 909g (Including Antenna)
3	Micro USB Port	USB 2.0 Micro-B
4	HDMI Port	HDMI (3840 x 2160 at 60Hz)
5	USB Port	2x USB 3.0 Ports (Type-A)
6	ETHERNET Port	1x 10/100/1000 Base-T RJ45
7	DC Port	Voltage Range 9V - 36V
8	Operating Temperature	-25°C to +85°C
9	CSI Port	2 Lane MIPI CSI-2, 15 pin FPC 1mm Pitch Connector
10	Antenna Port	Antenna Port
11	Force Recovery Button	Button for Recovery Mode
12	Reset Button	System Reset Button
13	Debug Connector	1x UART for Debug
14	Multi - I / O Connector	1x 3.3V UART, 1x I2C bus, 2x SPI bus, 4x GPIO